



ASSEMBLY

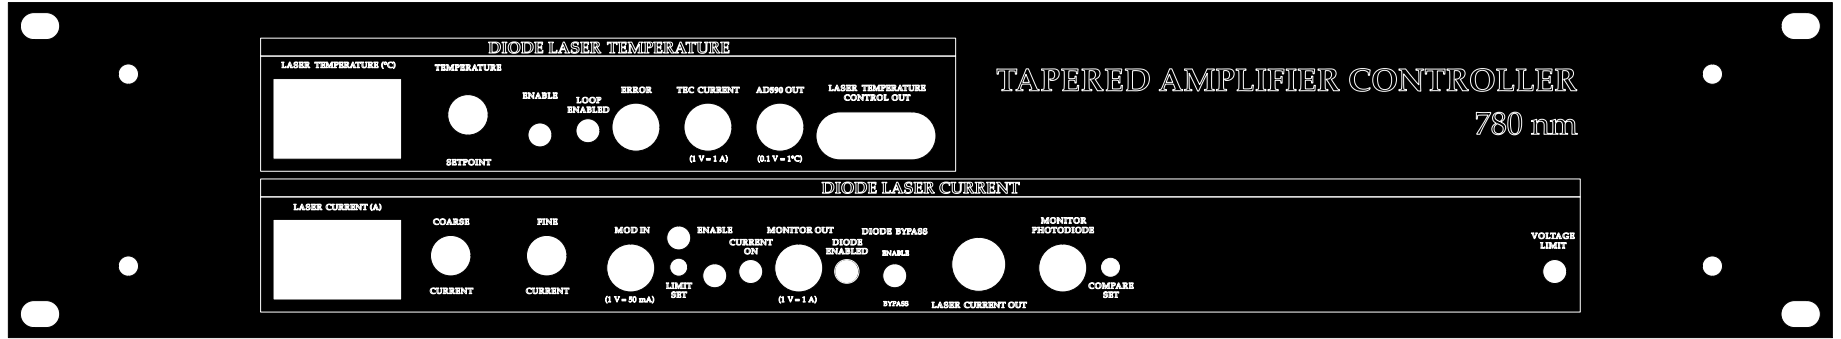

FRONT

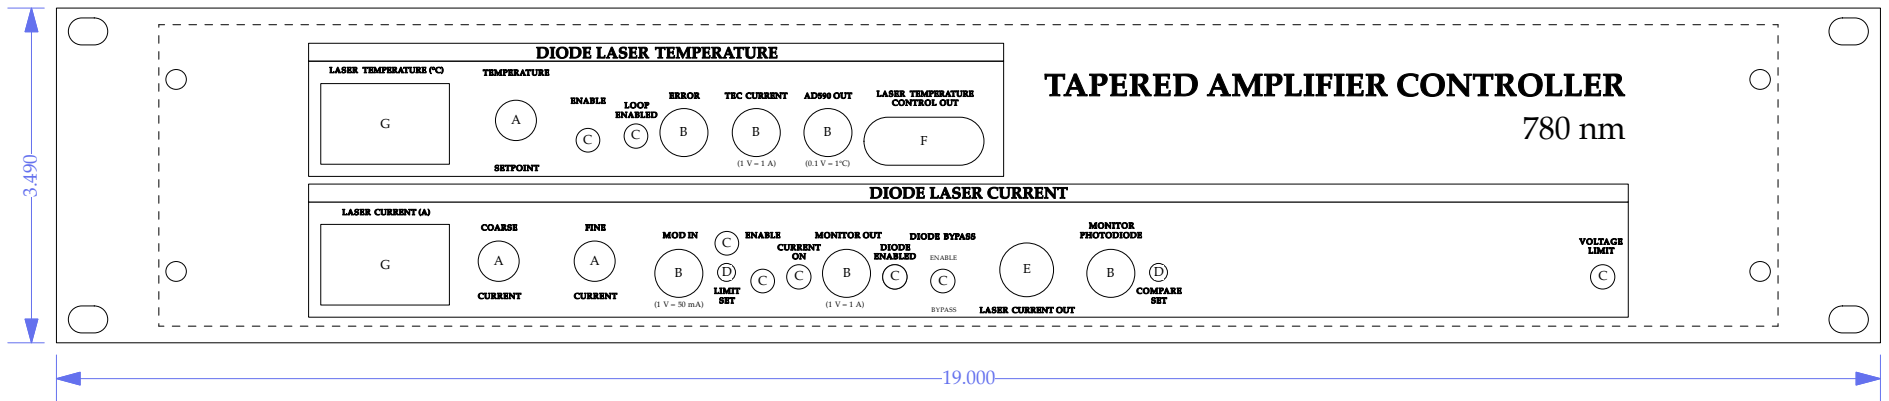

NOTES:

- A: Ø 0.422" hole through part (x3)
- B: Ø 0.5" hole through part (x6)
- C: Ø 0.25" hole through part (x8)
- D: Ø 0.188" hole through part (x1)
- E: Ø 0.563" hole through part (x1)
- F: 0.5"x1.25" slot through part, with Ø 0.5" fillets (x1)
- G: 0.84" x 1.34" rectangular slot through part (x2)

ADDITIONAL NOTES:

1. Holes cut using CNC machine (see .igs file). "Dog bone" corners needed for rectangular slot.
2. (Unlabeled) server mounting holes should already be cut, but are included in .igs file for convenience.
3. Text etched using 60 Watt laser cutter in architecture department. Use Illustrator file; laser cutter settings: 100% power and speed.

TAPERED AMPLIFIER FRONT PANEL

Y. KONG, P. MARTIN

10/05/10