


TOP VIEW

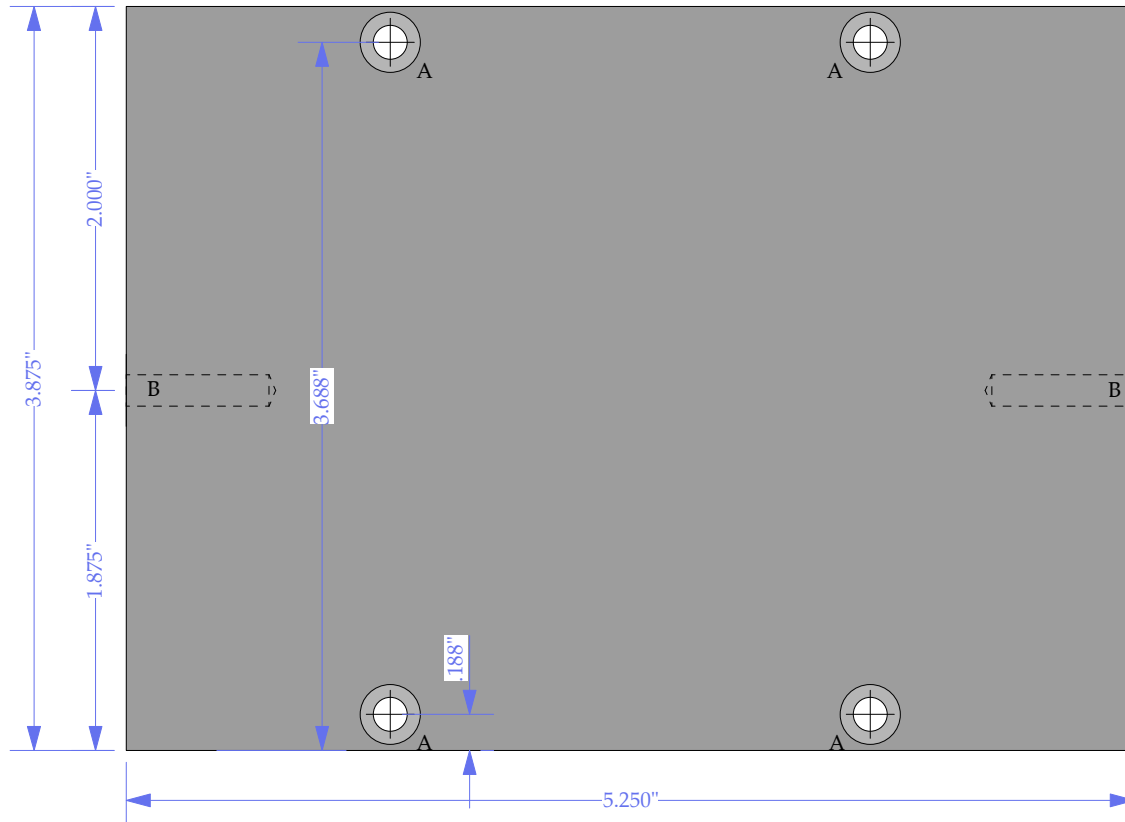


NOTES:

- A. 8-32 clearance through part with \varnothing 0.313" counterbore, 0.164" deep.
- B. 8-32 tapped, 0.75" deep.

ADDITIONAL NOTES:

- 1. Material is acrylic. Starting block is 5.625" x 3.875" x 0.375".
- 2. Standard tolerance is 0.005" unless otherwise noted.

FRONT VIEW

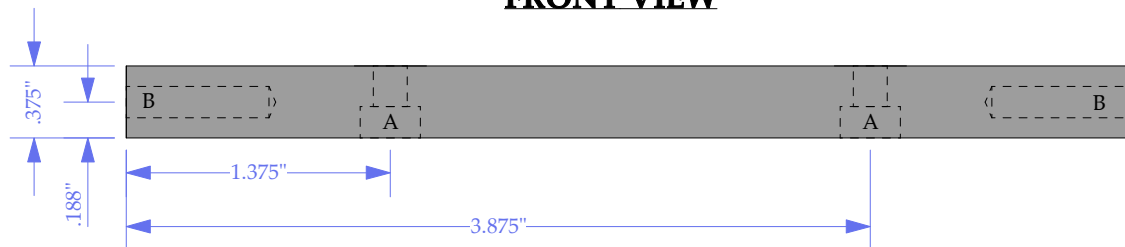

LONG LASER SILICONE MOLD -- SIDE WALL (x2)

P. MARTIN

03/08/12