


TOP VIEW

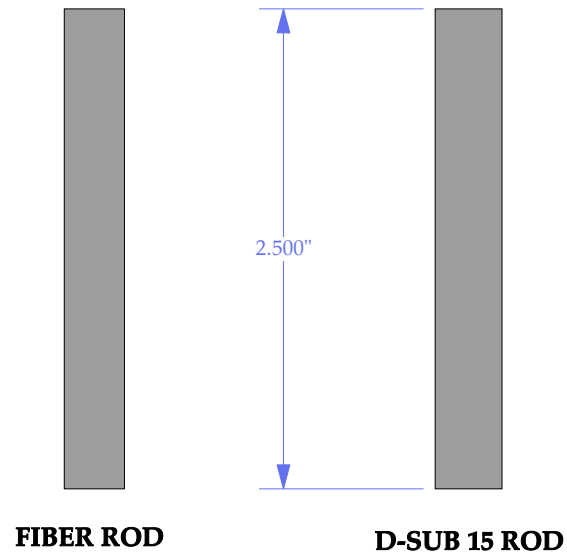

NOTES:

1. Any material is fine. Aluminum, stainless steel, Delrin, etc.
2. Should slide snugly into front wall.
3. Details of ends of rods is unimportant. The single-diameter part must be long enough to pass through front wall and touch fiber and D-sub molds.
4. See Assembly drawing for functionality.

LONG LASER SILICONE MOLD -- WIRE FEEDTHROUGH RODS

P. MARTIN

03/08/12

FRONT VIEW

