



TOP VIEW

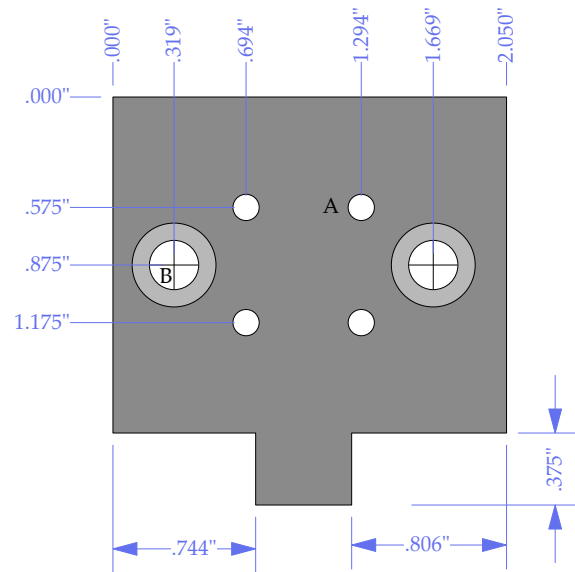

SIDE VIEW

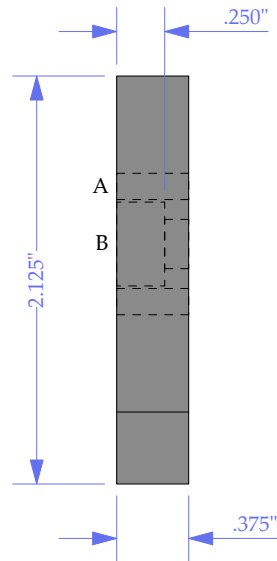

NOTES:

- A 8-32 tapped, 1/2" of useable thread
- B.: 1/4-20 clearance through part with \varnothing 0.438" counterbore, 0.250" deep.

ADDITIONAL NOTES:

1. Material is Delrin (any color). Starting block is 2.125" x 2.05" x 0.375".
2. Standard tolerance is 0.005"; holes and narrow piece should match up with the fiber mould.
3. This isolator mold to be used with "aspirin tablet" optical isolators.

LASER SILICONE MOLD -- ISLATOR MOLD, SHALLOW

P. MARTIN

09/01/10