



TOP VIEW

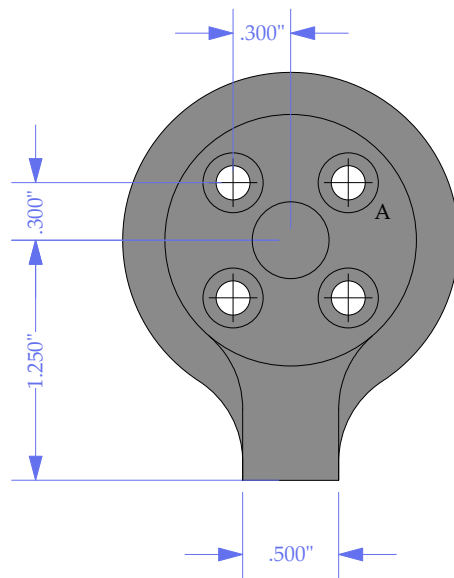

SIDE VIEW

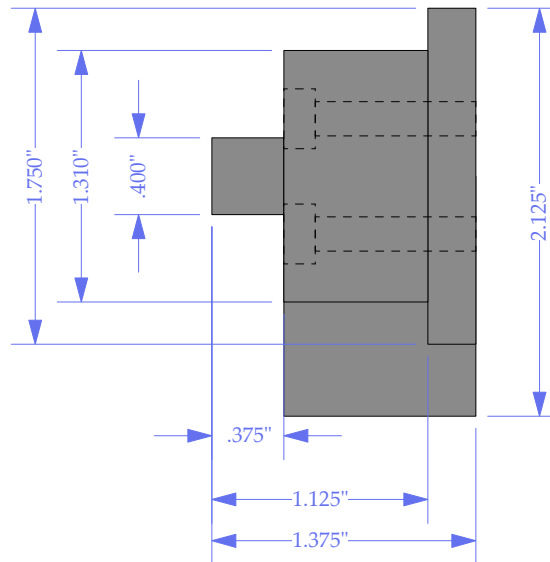

NOTES:

A: 8-32 clearance through part with
Ø 0.313" counterbore, 0.164" deep.

ADDITIONAL NOTES:

1. Material is Delrin (any color).
Starting block is 2.125" x 1.75" x 1.375".
2. Standard tolerance is 0.005" unless
otherwise noted. Holes should
match up with isolator mold.
3. Cut holes A first and use them to
secure part in CNC machine
4. Fillets are drawn as Ø 0.5", but
their accuracy and detail are
unimportant.

LASER SILICONE MOLD -- FIBER MOLD

P. MARTIN

09/01/10